

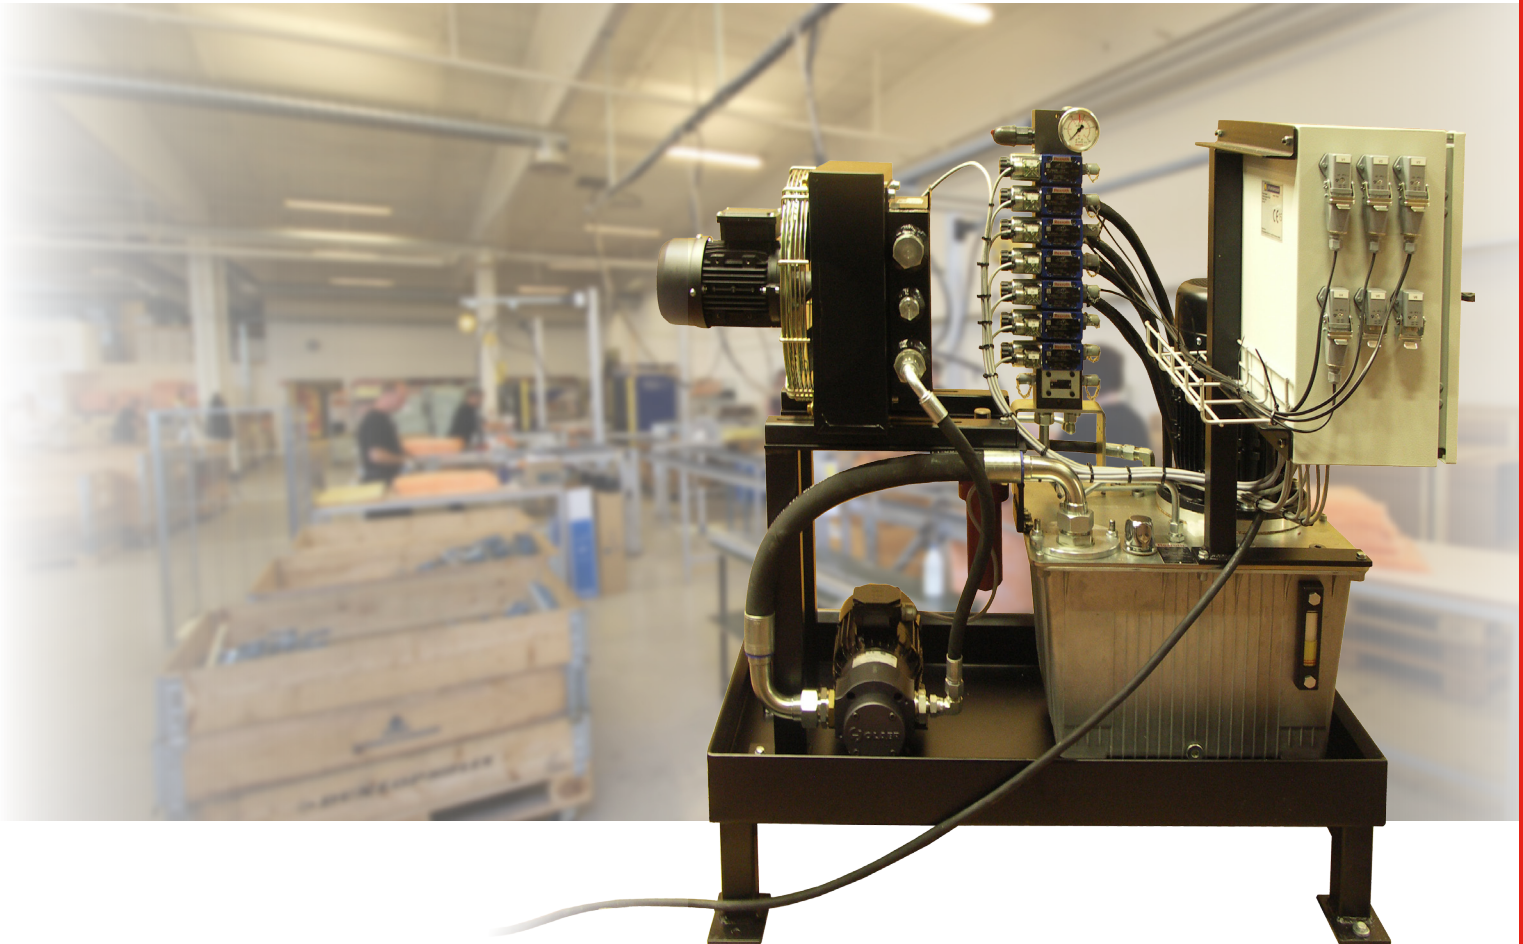


# Roger 6

Hydraulic unit



- ✓ Matched to suit the Jonas joining punch and the Thomas tab punch - max 6 units
- ✓ Compact and includes an electrical cabinet and oil spillage tray





# Technical data



Width:	≈ 600 mm
Length:	1200 mm with cooler
Height:	≈ 1100 mm
Hydraulic unit:	Of Rexroth/Mecman manufacture
Flow:	11 l/min
Pressure:	14.0 MPa
Motor:	3 kW
Tank volume:	40 l
Control voltage:	24 V AC
Main power supply*:	400 V, 3-phase + neutral + $\pm$ 50 Hz, 16 A
Hydraulic oil:	Shell Tellus 32 mineral oil or equivalent grade (DIN 51524, parts 2 and 3).

Subject to changes

\*) Can be altered to suit local conditions.



**johannesson**

SM Johannesson AB  
Box 121, SE-334 22 Anderstorp, Sweden  
Tel +46 371 58 87 00, Fax +46 371 58 87 01  
www.smj.se, e-mail: info@smj.se